




9320 Evergreen Blvd NW, Ste G
 Minneapolis, MN 55433
 Ph: 888.872.3487
 Fx: 763.795.8884
 www.radiustrack.com

Product Identification

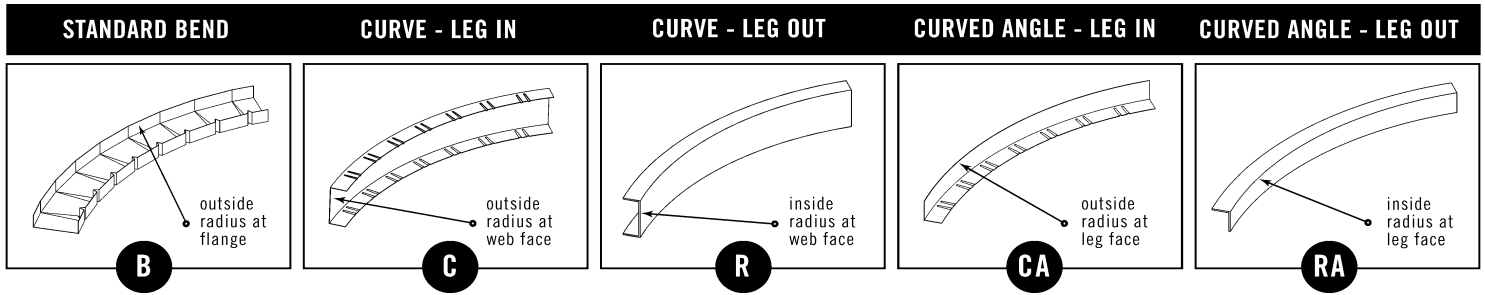

MEMBER DEPTH:
 (Example: 3⁵/₈" = 362)
 All members are taken in
 1/100 inches.

FLANGE WIDTH:
 (Example: 1¹/₄" = 125)
 All members are taken in
 1/100 inches.

CURVE TYPE:
 The alpha characters utilized
 by the designator system are:

- B** = Standard Bend
- C** = Curve Leg In
- R** = Curve Leg Out
- BSP, CSP, or RSP** = Spline
- RB, RC, or BC** = Compound Curve
- BF** = Flange Bend (Hat Channel)
- BL** = Lip Bend (Hat Channel)
- SBF** = Flange Bend with Reverse
- SBL** = Lip Bend with Reverse

MATERIAL:
 An "X" in the part number
 indicates that the price
includes the **Material** to be
 curved. If there is no "X" the
 price is for **Labor only**.

OTHER:
 May be found at end
 of part number.



STYLE:
 (Example: Track = T)
 The five alpha characters
 utilized by the designator
 system are:

- S** = C-Stud / Joist
- T** = Track
- ST** = Slip Track
- F** = Furring (Hat) Channel
- U** = Channel (CRC) Sections
- A** = Angle Sections

*Note: Material may be
 provided by any material
 manufacturer unless
 otherwise specified.

MATERIAL THICKNESS:
 (Example: 0.033 in. = 33 mils)
 The five alpha characters
 utilized by the designator
 system are:

- 30** = 20 gauge "Drywall" flat stock
- 30 V** = 20 gauge Equivalent (ex. Viper)
- 33** = 20 gauge "Structural"
- 43** = 18 gauge
- 54** = 16 gauge
- 68** = 14 gauge

Material thickness is the
 minimum base metal thickness
 in mils. Minimum base metal
 thickness represents 95% of
 the design thickness.

RADIUS CATEGORY:
 (Example: Greater than 100" = 2)
 The two numeric characters
 utilized by the designator
 system are:

- 1** = Less than 100" Radius
- 2** = 100" Radius or Greater

